



6'x6' ENCLOSED ROOM



Features and Specifications

Dimensions

Exterior Dimensions W x D x H: 77.4" x 77.4" x 96"

Interior Dimensions W x D x H: 72" x 72" x 90.5"

Meets ODA requirements for accessibility

Power

Two outlet, 2.0A USB, 110V, 15A, 60Hz

Light Switch for LED lights

Dual fan for comfort

Acoustics

MLV-Enermax sandwich acoustic insulation

35 STC standard assembly with additional double layer 26 STC MLV and Enermax sound deadening board sandwich.

Acoustic Glass

35 STC


Double layer high CAC (40) high NRC (.80) acoustic ceiling tiles

PET Acoustic Panels for inside absorption

0.30 NRC , Specify layout if ordered with whiteboard

Warranty

Limited 3 year warranty

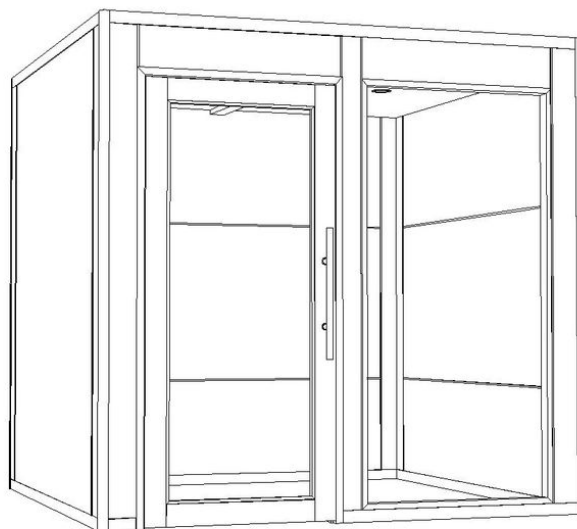

Optional

Accessories

Whiteboard

Locations optional

Worksurface

D-Top 24" x 36" x 1' thick.

Hardware

Ladder Pull

Privacy lock is standard; 24" or 48" options. Not available with electric strike option

Door closer

Appearance

Glass treatment

Frosting, bands, branding

Wrapping

Security



Routing for electric strike

Ladder pull door closer option not available

Rutherford 4 strike to be provided by client

Alternate design options available


Laminate Finishes



White

Willow Grey

Silver Grey

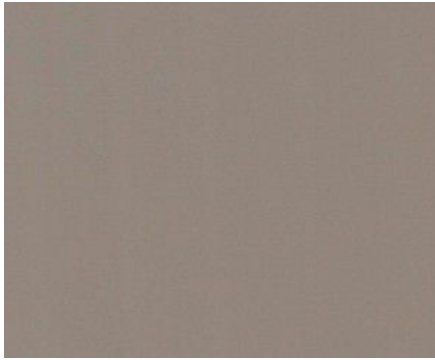

Milky Way

Storm Grey

Chocolate Walnut



London Fog

Windy City

Cappuccino



Nutmeg



Riviera Maple



Cherry Henna

Acoustic Panels



Charcoal Grey



Silver Grey